Investigation and Optimization of The Effect of Anhydrous Borax Mineral on The Vickers Hardness and Indentation Modulus Values of Iron Material

Şenol ŞAHİN[1], Ayşegül BODUR YILMAZ[2], Talha Tunahan KESEMENLİ[3]
[1] Kocaeli University, Kocaeli/Türkiye, sensah@kocaeli.edu.tr
[2] Kocaeli University, Kocaeli/Türkiye, aysegul.bodur@kocaeli.edu.tr
[3] Paktaş Platform A.S., Kocaeli/Türkiye, talha.kesemenli@gmail.com

Abstract **- In this study, 5% and 10% by weight of anhydrous borax (AHB) was added to the iron (Fe) matrix material by powder metallurgy method and the effects of the additive ratio on the Vickers hardness (HV), Brinell hardness (HB) and Indentation modulus (E_{IT}) values of the composites (Fe/AHB) were investigated. In the productions carried out using Taguchi experimental design method, AHB additive ratio, and sintering temperature parameters were selected as control parameters that were thought to affect the physical and/or mechanical properties of the Fe/AHB composite materials. The productions were carried out according to the Taguchi L4 orthogonal array, which was created depending on the control parameters and levels. Vickers hardness and indentation modulus measurements of pure iron and Fe/AHB composite materials were performed in accordance with BS EN ISO 14577-1 standard and Brinell hardness measurement was performed in accordance with TS EN ISO 6506-1 standard. According to the signal-to-noise ratio (S/N) analysis performed with the experimental data, it was determined that the 10% AHB additive ratio and 950ºC sintering temperature optimized all the investigated properties of the Fe/AHB composite material. It was determined that the values for Vickers hardness, Brinell hardness and indentation modulus increased by 142.03%, 69.32% and 144.11%, respectively, in the levels where the properties of the composite material were optimized compared to pure Fe material. As a result of the qualitative examination of all samples after storage in a comfortable environment without daylight, it was also observed that the anhydrous borax additive delayed the corrosion time of pure iron material.**

Keywords **- Anhydrous borax, composites, hardness, iron, powder metallurgy**

I. INTRODUCTION

Composites are a group of advanced technological materials formed by the combination of at least two different materials, where the components called matrix and reinforcement come together by creating an interface and behave as a single material. As technology has evolved, the properties expected from materials have changed and the increasing demand for lightweight materials with high chemical and mechanical strength in many sectors has increased the interest in composites [1,2].

Metal matrix composites (MMCs) with continuous fibers and whiskers as reinforcement were developed in the 1970s and proposed for applications requiring high performance. [3]. These materials have attracted great interest from industry due to their unique mechanical and structural properties [3,4].

The improved mechanical strength, wear resistance, hardness, stiffness, damping capacity, thermal stability, ductility of metal matrix composites have attracted attention for a wide range of applications [3,5]. MMCs are ideally suited for use in ground transportation and aviation in the reduction of structural weight and related fuel consumption. [5]. When the reinforcement materials preferred in the production of metal matrix composites, which can be produced by different techniques [7] such as powder metallurgy, spray deposition technique, and stir casting, are examined; silicon carbide (SiC) with high hardness, wear resistance, toughness, fatigue resistance properties and boron carbide (B_4C) with high melting point, low density, great resistance to chemical substances are frequently preferred materials [5]. Boron carbide (B_4C), an important reinforcement material, is the hardest known material after diamond and cubic boron nitride (cBN) [6].

When the materials used in the production sector do not perform as expected, situations such as production inefficiencies, quality problems and consequently customer dissatisfaction inevitably arise. In this context, there are different methods developed to improve both expected material properties and product quality. The Taguchi method is one of the methods developed to obtain the most information with the least amount of time, cost, and energy by designing experimental studies. It has proven to be an effective tool to create optimal production conditions in a wide range of production environments, especially in achieving more efficient results with reduced trials [8,9].

In this study, a metal matrix composite was produced with iron (Fe) as the matrix material and anhydrous borax (AHB), a type of boron mineral, as an additive.

By evaluating the effects of anhydrous borax and/or anhydrous borax additive ratio and sintering temperature factors on the mechanical properties of the final product (composite material), it is aimed to determine the most effective additive ratio and sintering temperature to increase Brinell hardness, Vickers hardness and indentation modulus values and to develop Fe/AHB composite material. The experimental study was carried out by Taguchi experimental design method and Fe/AHB composites were produced by powder metallurgy

method according to the obtained Taguchi orthogonal array.

II. MATERIAL AND METHOD

A. Iron (Fe)

Pure iron with a density of 7.87 g/cm^3, a melting temperature of 1535ºC and a grain size of 3 µm was used as matrix material for the production of composite materials.

B. Anhydrous Borax

Anhydrous borax mineral with the trade name Etibor-68 purchased from Eti Maden Operations, with a density of 2.37 g/cm^3 and a melting temperature of 742.5ºC, was ground and used under a sieve size of 20 µm as an additive material for the production of composite materials.

C. Implementation of Taguchi Method

Taguchi experimental design method was used to optimize the Brinell hardness, Vickers hardness and Iz modulus values of the composites produced and to determine the optimum levels of the factors. In addition to the control factor of sintering temperature, which is thought to affect the quality and mechanical properties of the composite products by powder metallurgy method, the AHB additive ratio was also specified as a control factor in order to investigate the effect of different weight percentages of AHB additive. (see Table 1).

Table 1: Control factors and their levels

Factors	Level 1	Level 2
AHB additive ratio (wt. %)	5	10
Sintering temperature (ºC)	850	950

Depending on the factors and their levels, Taguchi L4 orthogonal array was selected (see Table 2) and the productions were carried out in accordance with the orthogonal array. At least 3 specimens were produced for each test set-up and Brinell hardness, Vickers hardness values and indentation modulus values were determined by taking 5 different measurements on the specimens.

Table 2: Experimental conditions for L4 orthogonal array

Trials	AHB additive ratio (wt. %)	Sintering temperature (ºC)
1	5	850
2	5	950
3	10	850
4	10	950

Using the experimental data obtained after the measurements of Brinell hardness, Vickers hardness and indentation modulus values, signal-to-noise ratios (*S/N*) were examined in accordance with the "larger is better" method (see Equation 1) to determine the parameters that optimize these values.

$$S/N = -10 \cdot log\left(\frac{1}{n}\sum_{i=1}^{n}\frac{1}{y_i^2}\right) \quad (1)$$

Where, y_i = i. measured observation value, n = number of observations.

D. Composite Material Production

In the preliminary preparation stage before production, AHB was first subjected to grinding in RETSCH brand SK100 model device to reduce the grain size and then to sieving in RETSCH brand AS200 model device to separate the particles according to grain size. In order to obtain a homogeneous mixture, Fe/AHB composites with different weight percentages were prepared in a glass jar with a nickel ball inside using MSE-TEC brand ball mill machine at grinding speed of 200 rpm and grinding time of 30 minutes. Then, Fe/AHB composite materials were obtained (see Figure 1) in a DIEX model induction furnace, in a graphite mold with an inner diameter of 20 mm, at a constant heating rate of 45ºC/min to the sintering temperature, under a constant 15 min holding time at sintering temperature, and at different sintering temperatures (850ºC – 950 ºC). Since the sintering temperature was higher than the melting temperature of AHB used as an additive, AHB liquefied in the mold and caused fractures in the mold when pressure was applied. For this reason, the productions were carried out under a constant pressure of 2 MPa to prevent damage to the mold.

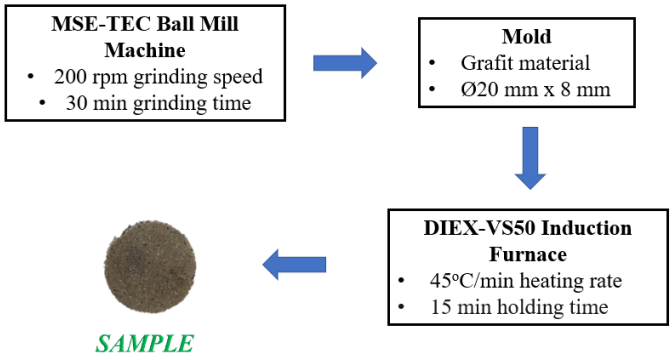

Figure 1: Sample production steps

E. Brinell Hardness, Vickers Hardness and Indentation Modulus Measurement

Vickers hardness and indentation modulus measurements were carried out under 1 kg load according to BS EN ISO 14577-1 standard on Zwick BZ2.5/TS1S instrumented hardness tester at Tübitak National Metrology Institute. Brinell hardness measurement was carried out under 31.25 kg load according to TS EN ISO 6506-1 standard in WOLPERT brand hardness tester in Kocaeli University Mechanical Engineering Department.

III. FINDINGS AND DISCUSSION

A. *Brinell Hardness Value*

The Brinell hardness values of the materials are comparatively graphed in Figure 2, which was prepared using the experimental data obtained. When Figure 2 is examined, it is determined that the hardness value of the composite material produced at 850ºC sintering temperature with 5 wt% AHB additive increased by 25.40% compared to the reference pure Fe material produced at 850ºC sintering temperature. It was also found that the hardness value of the composite material produced at 950ºC sintering temperature with 10% AHB additive increased by 69.32% compared to the reference pure Fe material.

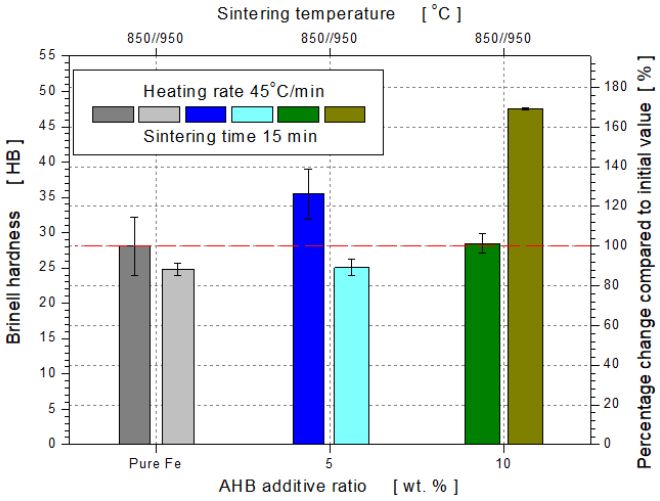

Figure 2: Graph of the change in Brinell hardness values

When the *S/N* ratio table (see Table 3) and graph (see Figure 3) are examined, it was determined that the most effective factor on Brinell hardness is the AHB additive ratio, which is the factor with the largest delta value. It was determined that the factor levels that optimized (maximized) the Brinell hardness value were 10% AHB additive ratio and 950ºC sintering temperature.

Table 3. S/N ratio response table of Brinell hardness values of composites

Level	AHB additive ratio	Sintering temperature
1	29.27	29.74
2	**31.08**	**30.61**
Delta	1.82	0.88
Rank	1	2

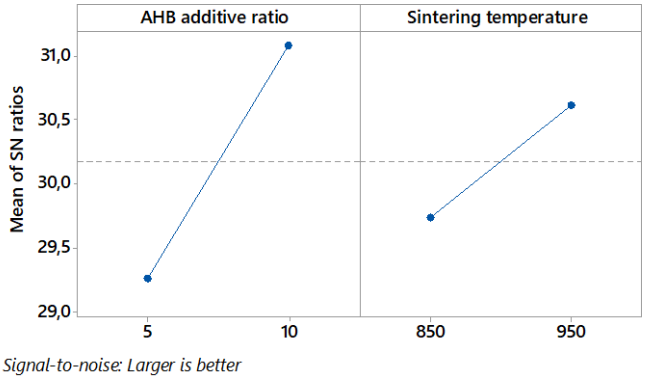

Figure 3: Main effects plot of S/N ratios of Brinell hardness values of composites

B. *Vickers Hardness Value*

The Vickers hardness values of the materials are comparatively graphed in Figure 4, which was prepared using the experimental data obtained. When Figure 4 is examined, it is determined that the hardness value of the composite material produced at 850ºC sintering temperature with 5 wt% AHB additive increased by 36% compared to the reference pure Fe material produced at 850ºC sintering temperature. It was also found that the hardness value of the composite material produced at 950ºC sintering temperature with 10% AHB additive increased by 142.03% compared to the reference pure Fe material.

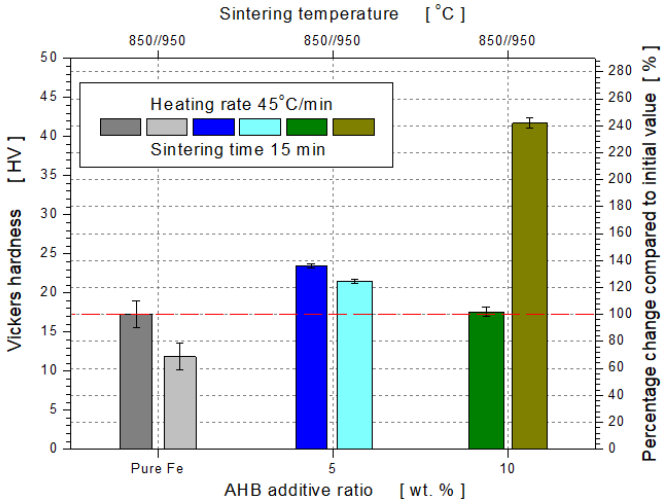

Figure 4: Graph of the change in Vickers hardness values

When the *S/N* ratio table (see Table 4) and graph (see Figure 3) are examined, it was determined that the most effective factor on Vickers hardness is the sintering temperature, which is the factor with the largest delta value. It was determined that the factor levels that optimized (maximized) the Vickers hardness value were 10% AHB additive ratio and 950ºC sintering temperature.

Table 4: S/N ratio response table of Vickers hardness values of composites

Level	AHB additive ratio	Sintering temperature
1	27.10	26.35
2	**29.07**	**29.81**
Delta	1.97	3.46
Rank	2	1

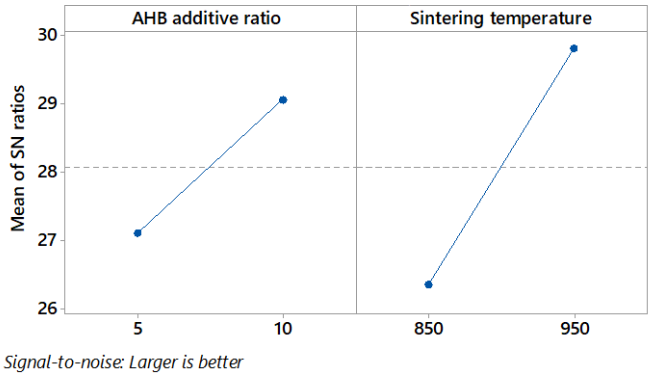

Figure 5: Main effects plot of S/N ratios of Vickers hardness values of composites

C. *Indentation Modulus Value*

The Indentation modulus values of the materials are comparatively graphed in Figure 6, which was prepared using the experimental data obtained. When Figure 6 is examined, it is determined that the hardness value of the composite material produced at 850ºC sintering temperature with 5 wt% AHB additive increased by 43.84% compared to the reference pure Fe material produced at 850ºC sintering temperature. It was also found that the modulus value of the composite material produced at 950ºC sintering temperature with 10% AHB additive increased by 144.11% compared to the reference pure Fe material.

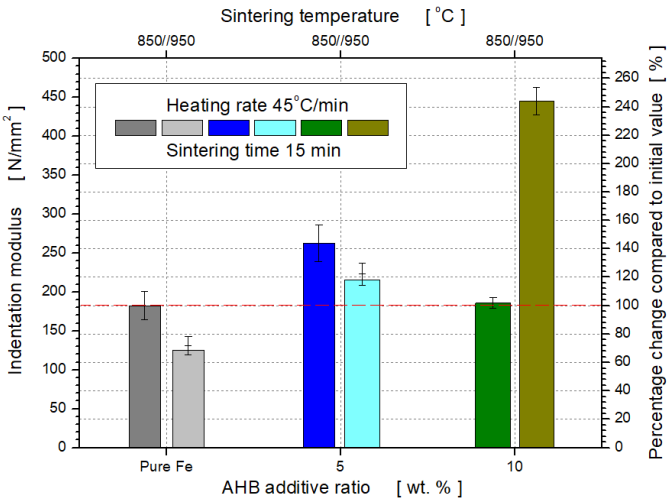

Figure 6: Graph of the change in Indentation modulus values

When the *S/N* ratio table (see Table 5) and graph (see Figure 7) are examined, it was determined that the most effective factor on Indentation modulus is the sintering temperature, which is the factor with the largest delta value. It was determined that the factor levels that optimized (maximized) the Indentation modulus value were 10% AHB additive ratio and 950ºC sintering temperature.

Table 5: S/N ratio response table of Indentation modulus values of composites

Level	AHB additive ratio	Sintering temperature
1	47.47	46.94
2	**49.53**	**50.05**
Delta	2.06	3.11
Rank	2	1

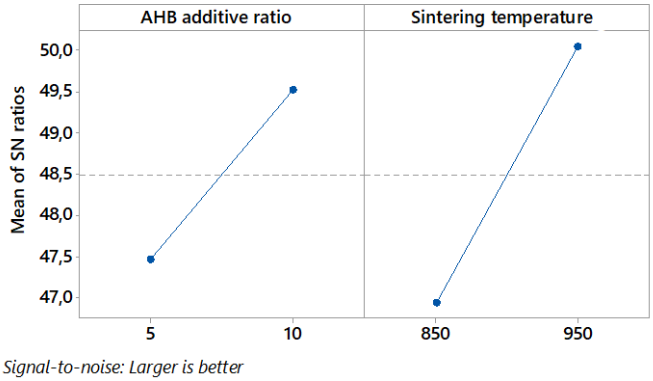

Figure 7: Main effects plot of S/N ratios of Indentation modulus values of composites

D. *Qualitative Examination*

As a result of the qualitative examination of all samples after storage during 12 months in a comfortable environment without daylight, it was observed that the anhydrous borax additive delayed the corrosion time of pure iron material (see Figure 8 and 9)

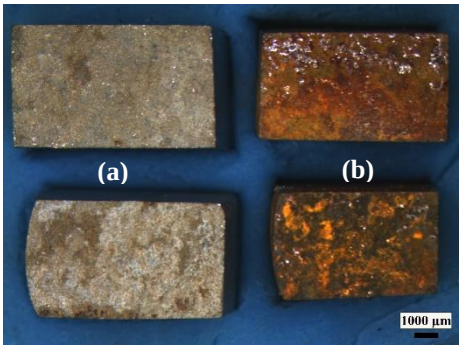

Figure 8: Macro image of produced at 850ºC sintering temperature (a) Fe/AHB composite with 5% AHB additive and (b) pure Fe materials

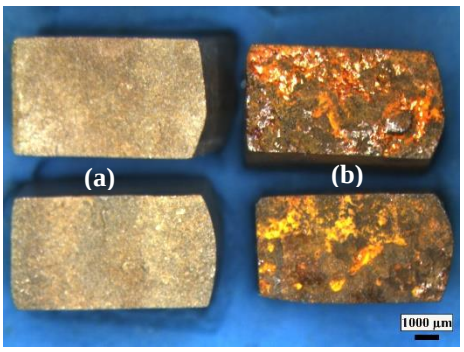

Figure 9: Macro image of produced at 950ºC sintering temperature (a) Fe/AHB composite with 10% AHB additive and (b) pure Fe materials

IV. RESULTS

The Brinell hardness, Vickers hardness and indentation modulus were strongly affected by the AHB additive.

Compared with the pure reference material (850ºC), the composite sample with 10% AHB additive, prepared at a sintering temperature of 950ºC, showed the best results with an increase in Brinell hardness, Vickers hardness and indentation modulus of 69.32%, 142.03% and 144.11%, respectively.

The factors that optimize the Brinell hardness, Vickers hardness and indentation modulus together are the ratio of 10% SB additive and the sintering temperature of 950ºC.

As a result of the qualitative examination of all samples after storage during 12 months in a comfortable environment without daylight, it was observed that the anhydrous borax additive delayed the corrosion time of pure iron material.

In future studies on the related subject, it is recommended to decrease/increase the particle size of anhydrous borax and to decrease/increase the anhydrous borax additive ratios and to examine the effect of different production parameters.

ACKNOWLEDGMENT

This study was prepared within the scope of the master's thesis titled "*Production of anhydrous borax added iron material by powder metallurgy and optimization of tribological and mechanical properties by experimental design method*" with the thesis number 651237 of the Council of Higher Education.

REFERENCES

[1] Petersson, H., "Carbon Fiber Composite Materials in Modern Day Automotive Production Lines: A Case Study", *Proceedings of the ASME 2013 International Mechanical Engineering Congress & Exposition IMECE2013*, San Diego, California, USA, 2013.

[2] V. V. Reddy, R. K. Mandava, V. R. Rao, S. Mandava, "Optimization of dry sliding wear parameters of Al 7075 MMC's using Taguchi method", *Materials Today: Proceedings*, Vol 62, pp. 6684–6688, 2022

[3] V. Rana, H. Kumar, A. Kumar, "Fabrication of hybrid metal matrix composites (HMMCs) –A review of comprehensive research studies", *Materials Today: Proceedings*, Vol 56 pp. 3102–3107, 2022

[4] P.D. Mangalgiri, "Composite materials for aerospace applications", *J. Bull. Mater*. Sci. 22 (3) 657–664, 1999

[5] S. Seetharaman, J. Subramanian, R. A. Singh, W. L. E. Wong, M. L. S. Nai, M. Gupta, "Mechanical Properties of Sustainable Metal Matrix Composites:A Review on the Role of Green Reinforcements and Processing Methods", *Technologies*, https://doi.org/10.3390/technologies10010032, 2022

[6] E. Karacay, "Production of boron carbide and its characterization", Gazi University, Institute of Science and Technology, Master Thesis, Ankara, Türkiye, 2008.

[7] M.K. Surappa, "Microstructure evolution during solidification of DRMMCs (Discontinuously reinforced metal matrix composites): State of art", *Journal of. Material Process Technology*, vol 63 (1-3) pp. 325–333, 1997

[8] M. Inal, S. Sahin. ve Y. Sahin, "Optimization of the Young's Modulus of Low Flow Polypropylene Talc/Colemanite Hybrid Composite Materials with Artificial Neural Networks", IFAC-PapersOnLine Volume 51, Issue 30, Pages 277-281, 2018

[9] A. Bodur., S. Sahin. ve Y. Sahin, M. Inal, "Modelling of the Flexural Strength of Low Flow Polypropylene Talc/Colemanite Hybrid Composite Materials with Taguchi and ANFIS Methods", IFAC-PapersOnLine Volume 51, Issue 30, Pages 271-276, 2018

SELCUK UNIVERSITY
FACULTY OF TECHNOLOGY

ICENTE'22

INTERNATIONAL CONFERENCE ON ENGINEERING TECHNOLOGIES

November 17-19, 2022 Konya/TURKEY

Certificate

This is to certify that

the paper entitled

"INVESTIGATION AND OPTIMIZATION OF THE EFFECT OF ANHYDROUS BORAX MINERAL ON THE VICKERS HARDNESS AND INDENTATION MODULUS VALUES OF IRON MATERIAL"

has orally presented at the

"International Conference on Engineering Technologies (ICENTE'22)"

held in Konya, TURKEY on 17-19 November, 2022.

Author(s) of the paper:

SENOL SAHIN, AYSEGUL BODUR YILMAZ, TALHA TUNAHAN KESEMENLI



Prof. Dr. Sakir TASDEMIR
Chair

SELCUK UNIVERSITY
FACULTY OF TECHNOLOGY

ICENTE'22

INTERNATIONAL CONFERENCE ON ENGINEERING TECHNOLOGIES

November 17-19, 2022

Konya/TURKEY

PROCEEDINGS BOOK

Editor
Prof. Dr Sakir TASDEMIR

E-ISBN: 978-605-72066-2-6





International Conference on Engineering Technologies

6th International Conference, ICENTE
Konya, Turkey, November 17-19, 2022

Proceedings Book

Editor
Sakir TASDEMIR

International Conference on Engineering Technologies, **ICENTE'22**
Konya, Turkey, November 17-19, 2022

6TH INTERNATIONAL CONFERENCE ON ENGINEERING TECHNOLOGIES

17-19 NOVEMBER 2022

Editör
Şakir TAŞDEMİR

Her hakkı saklıdır. Bu kitabın tamamı ya da bir kısmı yazarlarının izni olmaksızın, elektronik, mekanik, fotokopi ya da herhangi bir kayıt sistemi ile çoğaltılamaz, yayınlanamaz depolanamaz. Bu kitapta yayınlanan tüm yazı ve görsellerin her türlü sorumluluğu yazarlarına aittir.

All rights of this book are reserved. All or any part of this book cannot be published, stored, printed, filmed or used indirectly without the permission of the authors. It cannot be reproduced by photocopy or any other technique. All responsibility of all texts and visuals published in the book belongs to the author(s).

EBOOK ISBN: 978-605-72066-2-6
KEYKUBAT YAYINLARI
Akademi Mah. Yeni İstanbul Cad. No:343 /Z01 Selçuklu / KONYA
MATBAA SERTİFİKASI: 46389

Konya Kasım 2022

KEYKUBAT YAYINLARI
Akademi Mah. Yeni İstanbul Cad. No:343 /Z01 Selçuklu / KONYA
T.C. KÜLTÜR BAKANLIĞI YAYINCI SERTİFİKASI: 46389

CONTENTS

THE EFFECT OF PULSE WIDTH AND FREQUENCY IN A MULTISCALE COMPUTATIONAL MODEL OF A SINGLE CELL **1**
MAHMUT EMIN CELIK
ECG ARTIFACTS REMOVING USING ZERO PHASE FILTERING **5**
SEMA YILDIRIM
ELELECTRONIC PERSONALITY AND THE LEGAL LIABILITY ARISING FROM ARTIFICIAL INTELLIGENCE AI **10**
ALPER UYUMAZ
INVESTIGATION OF THE EFFECT OF DATA AUGMENTATION ON TURKISH PARAPHRASE DETECTION **14**
ZEYNEP BANU OZGER,SERDAR ERTEM
ON THE USE OF TIME SERIES DATASETS THROUGH GOOGLE EARTH ENGINE TO MONITOR THE FOREST COVER LOSS IN TURKIYE BETWEEN 2001 AND 2021 **20**
CIGDEM SERIFOGLU YILMAZ
THE IMPACT OF RESEARCH AND CITATIONS ON WORLD RANKINGS OF COUNTRIES WITH THE BEST UNIVERSITIES **25**
LUAN GASHI,ARTAN LUMA,YLBER JANUZAJ
MOVING THE TEACHING FROM TRADITIONAL CLASS TO LEARNING MANAGEMENT SYSTEM HELPING STUDENTS LEARN FROM HOME **31**
BESNIK DURIQI,ARTAN LUMA,YLBER JANUZAJ,HALIL SNOPCE,AZIR ALIU
OPEN DATA IN EDUCATION A SYSTEMATIC REVIEW **35**
ARBNOR RUSHITI,ARTAN LUMA,YLBER JANUZAJ,AZIR ALIU,HALIL SNOPCE
A USE CASE FOR CUSTOMER SEGMENTATION IN THE SAVINGS FINANCE SECTOR USING DESCRIPTIVE ANALYTICS **42**
MURAT AYYILDIZ,ZEKERIYA KOSE,MUGE OLUCOGLU,CEVHERNUR SOYLEMEZ PEKTAS
HOW DO PANSHARPENING STRATEGIES AFFECT SPECTRAL INDICES ON WORLDVIEW 2 DATASETS **46**
VOLKAN YILMAZ
STATIC ANALYSIS OF MALWARE DETECTION USING MACHINE LEARNING ALGORITHMS **50**
NISA VURAN SARI,MEHMET ACI
A REVIEW ON DEEP LEARNING BASED METHODS DEVELOPED FOR LUNG CANCER DIAGNOSIS **54**
TURKAN BEYZA KARA,AHMET CEVAHIR CINAR
AGENT BASED MODELLING OF CELL CYCLE BEHAVIOR **59**
AYNUR SEN,KASSIM KINGALU,SEVCAN EMEK,SEBNEM BORA
DUPLICATION DETECTION IN VIDEOS USING DWT ALGORITHM **65**
ISILAY BOZKURT,GUZIN ULUTAS
A PERFORMANCE WAY COMPARISON OF DOCKER SWARM AND KUBERNETES **69**
ONUR YURTSEVER,EYUP EMRE ULKU

DUPLICATION FORGERY DETECTION BASED ON WEBER ALGORITHM **73**
ISILAY BOZKURT,GUZIN ULUTAS
DETECTION OF SUSPICIOUS ACTIVITIES ON WINDOWS SYSTEMS WITH LOG ANALYSIS **77**
ALI OZTURK,EYUP EMRE ULKU
AN EMPIRICAL ANALYSIS OF HOW USERS WITH DIFFERENT GENDERS ARE NOT EQUALLY AFFECTED BY THE RECOMMENDATIONS **81**
EMRE YALCIN
VOICE CONTROL OF VIRTUAL OBJECTS IN AUGMENTED REALITY APPLICATIONS **86**
TUBA EMEKLI COBAN,ALI OZTURK
ANALYSIS OF DRYING CHARACTERISTICS OF DRIED DAMSON PLUM BY MICROWAVE DRYING **92**
NECATI CETIN,BERFIN ALSAN,SANIYE IVECAN
THE EFFECT OF GRADUALLY INCREASING MICROWAVE POWER ON THE DRYING KINETICS COLOR PARAMETERS AND ENERGY ASPECTS OF CARROTS **97**
NECATI CETIN,SEDA GUNAYDIN
A CLASSIFICATION AND SHORT LITERATURE REVIEW ON 3D USER INTERFACE 3D UI SENSING TECHNOLOGIES **103**
COSKUN DENIZ
WORD CLOUD IMPROVEMENTS WITH NATURAL LANGUAGE PROCESSING TECHNIQUES FOR TURKISH LANGUAGE **108**
ANIL ATVAR,MUSTAFA ERSAHIN
USAGE AND PERFORMANCE COMPARISONS OF MACHINE LEARNING METHODS FOR TEXT CLASSIFICATION **113**
HASAN AKYOL,MUSTAFA ERSAHIN
DESIGN AND DEVELOPMENT OF SMART CONTRACT FOR PUBLIC ADMINISTRATION FOCUSED ON REAL ESTATE CERTIFICATES MANAGEMENT BY USING ETHEREUM AND IPFS **117**
ADMIRIM ALITI,MARIKA APOSTOLOVA,ARTAN LUMA
A REAL LIFE USE CASE FOR PREDICTING SALES OF BUS TICKETS **122**
HINCAL TOPCUOGLU,BEHCET MUTLU,CEVHERNUR SOYLEMEZ
THE NEXT GENERATION VIDEO PROCESSING TECHNOLOGY A GUIDE TO AWS DEEPLENS **125**
PINAR ERSOY,MUSTAFA ERSAHIN
THE INFLUENCE OF DONOR AND RECEIVER COMBINATIONS ON IMMUNE PLASMA PROGRAMMING IN SYMBOLIC REGRESSION PROBLEMS **131**
BEGUM YETISKIN,SIBEL ARSLAN
USING PERMISSIONED BLOCKCHAIN IN EDUCATION SYSTEM FOR INTERNSHIP **137**
OZGUR OKSUZ
A BORDA COUNT BASED INITIALIZATION METHOD FOR SELF ORGANIZING MAPS **143**
SUMEYRA SENOL,FIRAT ISMAILOGLU

EVALUATION OF TIME SERIES DECOMPOSITION ON STATISTICAL AND MACHINE LEARNING BASED FORECASTING MODELS **148**
ZEYNEP IDIL ERZURUM CICEK
A RECOMMENDATION SYSTEM STUDY ON USER PRODUCT DATA **152**
BEGUM UYANIK,GUNCE KEZIBAN ORMAN
ANALYSIS OF DATA SECURITY AND PRIVACY IN PUBLIC INSTITUTIONS ACCORDING TO GDPR IN THE REPUBLIC OF KOSOVO **159**
ELISSA MOLLAKUQE, ERSAN HAMDIU, NIDA SANTURI FISHEKQIU, SAMIR JAKUPI
COMPARISON OF FEATURE SELECTION METHODS IN THE ASPECT OF PHISHING ATTACKS **164**
ALI SENOL
DATA SECURITY ANALYSIS BASED ON DATA CLASSIFICATION ACCORDING TO DATA SENSITIVITY CASE STUDY DATA ON PUBLIC AND PRIVATE UNIVERSITIES IN THE REPUBLIC OF KOSOVO **168**
ELISSA MOLLAKUQE,VESNA DIMITROVA
ELECTROMAGNETIC COMPATIBILITY EMC SIMULATION AND APPLICATION IN AUTOMOTIVE ELECTRONICS **171**
ALPEREN YAZAR,METIN HUNER
IMPLEMENTATION OF MODIFIED KARNIK MENDEL ALGORITHM BASED INTERVAL TYPE 2 FUZZY INFERENCE SYSTEM FOR AIRCRAFT PITCH CONTROL **175**
MUHAMMET OZTURK,TARIK UNLER,GIZEM BEDENLI,SAKINE KURTAR,NUR YILDIRIM,TOLUNAY DAG
EFFECTS OF VOLTAGE SAGS ON VARIABLE FREQUENCY DRIVE IN INDUSTRIAL FACILITIES **181**
HALIL YASAR USTUNEL,OGUZHAN TIMUR
VIOLENCE DETECTION IN VIDEOS BASED ON DEEP LEARNING APPROACHES **184**
LEVENT CIVCIK,OSAMA ALKAYAL
ENSURING BUSH DEBURRING OPERATION PROCESS TRACEABILITY AND AUTOMATIC PROCESS CONTROL **190**
MUHAMMED ABDULLAH OZEL,SELIM SEFA BAYSAL,MUSTAFA ACARER
USING TEMPLATE MATCHING ALGORITHM IN WELDING ROBOTS **193**
LEVENT CIVCIK,MUHAMMED ALPEREN AKSIN
C BAND MICROSTRIP ANTENNA ARRAY ON PHOTOGRAPH PAPER SUBSTRATE **200**
DILEK UZER,AYSE OZGE CINAR,ZEYNEP IREM KOFUN,NEBI BERHAN TAS
ISM 2 4 GHZ BAND ANTENNA DESIGN FOR RF ENERGY HARVESTING SYSTEMS **204**
CEM GOCEN,ISMAIL AKDAG,MEHMET ALI BELEN,PEYMAN MAHOUTI,ADNAN KAYA,MERIH PALANDOKEN
THERMAL BEHAVIOR ASSESSMENT OF XLPE INSULATED MV POWER CABLES UNDER DIFFERENT CONDITIONS **207**
CIHAT CAGDAS UYDUR
DETERMINATION OF THE SAR VALUES OF THE ELECTROMAGNETIC FIELD EMITTED FROM THE PATCH ANTENNAS AT 900 MHZ AND 1800 MHZ FREQUENCIES **212**
UGUR SORGUCU

PULSE DENSITY MODULATION CONTROLLED HIGH FREQUENCY RESONANT CONVERTER FOR WIRELESS POWER TRANSFER SYSTEMS **215**
CEM KUTLU,HARUN OZBAY
DIGITAL CURRENCY TIME SERIES PREDICTION BASED ON FINANCIAL SIGNAL PROCESSING ANT COLONY OPTIMIZATION AND MACHINE LEARNING TECHNIQUES **220**
SECKIN KARASU,NEDIM AKTAN YALCIN
A METHOD TO IMPLEMENT TERNARY LOGIC GATES VIA MULTI THRESHOLD TRANSISTORS **225**
AHMET UNUTULMAZ
MATHEMATICAL MODELING AND SIMULATION OF SOLAR PHOTOVOLTAIC MODULE IN MATLAB SIMULINK **229**
MUSTAFA SACID ENDIZ
PRINCIPLES AND UTILIZATION OF A SINGLE PHASE Z SOURCE INVERTERS **234**
HUSSEIN AL BAYATY,FIDAN T SEDEEQ,MUNA SUDDEQ KIDER
STIFFNESS IN THE KNITTED FABRICS WITH VORTEX YARNS **238**
SEVAL UYANIK,PINAR DURU BAYKAL
THE EFFECTS OF HARD WASTE ON YARN QUALITY **242**
SEVAL UYANIK,FATMA DEMIRCI
LEVULINIC ACID PRODUCTION BY CATALYTIC DECOMPOSITION OF FRUCTOSE GLUCOSE AND CELLULOSE **245**
CHINGIZ NASIRLI,NIHAL CENGIZ,LEVENT BALLICE
FATIGUE PROPERTIES OF HOT DIP ALUMINIZED INCONEL 718 SUPERALLOY **249**
IBRAHIM GOKDEMIR,MERTCAN KABA,ERDEM BALCI,AHMET KAVUKCU,MURAT BAYDOGAN
INFLUENCE OF ALUMINUM OXIDE ON MAIN ELECTRICAL RESISTIVITY FEATURES OF BI 2212 CERAMIC COMPOUNDS **254**
MUHAMMED OZ,GURCAN YILDIRIM,CABIR TERZIOGLU
EFFECT OF ALUMINUM OXIDE ON MAIN SUPERCONDUCTING FEATURES OF BI2 1SR2 0CA1 1CU2 0OY CERAMICS **259**
MUHAMMED OZ, CABIR TERZIOGLU, GURCAN YILDIRIM
THE ATOMIC FORCE MICROSCOPY STUDY OF AMORPHOUS BISBTE THIN FILM WITH THE VARIOUS DEPOSITION PRESSURE **264**
MEHMET CETIN,GIZEM DURAK YUZUAK,ERCUMENT YUZUAK
FABRICATION AND CHARACTERIZATION OF ANODIC FILMS ON 304 STAINLESS STEEL **268**
NIHAN AGIRLAR,NIHAT CAN BAGCI,ECE ARKALI,CEVAT SARIOGLU,GORKEM YUMUSAK
SOUND PROBLEM OF SHIP ENGINES AND ITS EFFECT ON SEAFARERS **274**
OKAN BUYUKACAR,GULENAY ALEVAY KILIC,SEMIN KAYA
DYNAMICS ANALYSIS OF A HEAD NECK REHABILITATION ROBOT USING NEWTON EULER EQUATIONS **277**
ATILLA BAYRAM,AHMET SADIK DURU
TOWARDS AN EFFICIENT MAINTENANCE MANAGEMENT PLAN **282**
NOR EL HOUDA KHANFRI,NOUARA OUAZRAOUI,ANTAR SI MOHAMMED,HAFED TOUAHAR

RAPID LASER PROTOTYPED MICROFLUIDIC DEVICES FOR ON CHIP EMULSION GENERATION **287**
SINAN GUCLUER
INVESTIGATION OF THE EFFECT OF THE USE OF TOP DEFLECTORS ON AERODYNAMIC PERFORMANCE IN VEHICLES WITH CFD ANALYSIS **292**
HAYDAR KEPEKCI
NUMERICAL ANALYSIS OF LAMINAR HEAT TRANSFER FOR NANOFLUIDS IN A MICROCHANNEL **297**
ILKER GOKTEPELI,ULAS ATMACA
EASY TO CARRY AND MOBILE BIOGAS SYSTEM DESIGN **303**
RAHMI GUNDESLI,KUBRA BUYUKHAN
EVALUATION OF HEMP SEED IN THE FIELD OF ENERGY BIODIESEL PRODUCTION **307**
HIDAYET OGUZ,MERVE CELIK TOLU
LARGE DEFLECTIONS OF BI DIRECTIONAL FUNCTIONALLY GRADED CANTILEVER BEAMS **311**
AYHAN HACIOGLU,ADEM CANDAS,CEMAL BAYKARA
EXPERIMENTS AND SIMULATIONS OF A LIQUID CONTAMINANT PROPAGATION IN A VEGETATED BOTTOM CHANNEL **315**
ROMDHANE HELA,SOUALMIA AMEL
DETERMINATION OF GEOMETRICAL PROPERTIES OF FORMED SHEET METAL PARTS WITH 3D SCANNING METHOD **320**
MEVLUT AYDIN,OSMAN OZTURK,MEVLUT TURKOZ
A STUDY ON NANOBEAM WITH SPRING **324**
BURAK EMRE YAPANMIS
INVESTIGATION OF CLASSIC AND NON CLASSIC FUNCTIONALLY GRADED BEAMS MODEL **327**
BURAK EMRE YAPANMIS,SULEYMAN MURAT BAGDATLI
ANALYSIS OF POSITION LEVEL FORWARD KINEMATIC SINGULARITIES OF PLANAR RPRPR PARALLEL ROBOTS **331**
MUSTAFA OZDEMIR,LEVENT KARAKAYA
COMPARISON OF PLACEMENT HEURISTICS IN SIMULATED ANNEALING FOR THE ONE DIMENSIONAL CUTTING STOCK PROBLEM **335**
BANU ICMEN ERDEM,REFAIL KASIMBEYLI
EXPERIMENTAL STUDY AND GREY CORRELATION ANALYSIS OF UNCONSOLIDATED UNDRAINED TRIAXIAL COMPRESSION BEHAVIOR FOR GEOTEXTILE REINFORCED CLAY **339**
MUHAMMET NURI ODEMIS,MUGE ELIF ORAKOGLU FIRAT
MICROSTRUCTURE ANALYSIS OF RECYCLED FERROCHROME FILLED POLYMER CONCRETES CONTAINING SWCNT **345**
SERKAN SUBASI,FATIH DOGAN,HEYDAR DEHGHANPOUR,MUHAMMED MARASLI
REAL ESTATE VALUATION WITH REGRESSION ANALYSIS THE CASE OF MERAM DISTRICT OF KONYA PROVINCE **351**
TANSU ALKAN,OMER FARUK ATIZ,SULEYMAN SAVAS DURDURAN,MUHAMMED IKBAL BAYRAKDAR

DEVELOPING A NOVEL PHOTOGRAMMETRY METHODOLOGY IN CULTURAL HERITAGE DOCUMENTATION MARDIN MELIK MAHMUT MOSQUE **354**
IZZETTIN KUTLU,ASENA SOYLUK,ALI IHSAN UNAY
DETERMINATION OF G0 SHEAR MODULUS OF SANDY PUMICE SOIL **360**
IBRAHIM YIGIT,ABDURRAHMAN USAL,ELIFNUR SAKALAK
FUNDAMENTAL PERIODS OF ISOLATED BRIDGES WITH TALL COLUMN BENTS AND SOIL INTERACTION **363**
ALI IHSAN KARAKAS
ECONOMIC FEASIBILITY ASSESSMENT IN DESIGN OF SUSTAINABLE PREFABRICATED INDUSTRIAL BUILDINGS AND THE CASE STUDY OF DEMIR EKOSAN **369**
DENIZ CAGLA BAL,SELIN KOCA
MODAL ANALYSIS OF THE STEEL INDUSTRY STRUCTURE BY FINITE ELEMENT METHOD ACCORDING TO TBDY 2018 REGULATION **375**
HAKAN AYDIN
A CASE STUDY FOR VALIDATION OF KP505 PROPELLER OPEN-WATER CHARACTERISTICS VIA COMPUTATIONAL FLUID DYNAMICS **382**
MUHAMMED CINAR; HAKAN UCAR, FERHAT DIKMEN
ARCHITECTURAL RESEARCH OF THE INTERACTION BETWEEN THE STRUCTURAL SYSTEM OF BUILDINGS AND CURTAIN WALL: AN ANALYSIS ON SELECTED BUILDINGS IN ANKARA **388**
TUGCE ERARTSIN, ALI IHSAN UNAY
DESIGN OF A CMOS OPERATIONAL TRANSCONDUCTANCE AMPLIFIER FOR CURRENT CONTROLLED 2ND ORDER ACTIVE FILTER DESIGN **392**
SERHAN YAMACLI
BIOMASS ENERGY POTENTIAL, ITS CURRENT USAGE STATUS, AND DEVELOPMENTS IN BIOMASS ENERGY PRODUCTION SYSTEMS IN TURKEY **397**
FARUK KOSE, SULEYMAN KOSE
INVESTIGATION OF ENERGY SUPPLY OF A RESIDENTIAL AREA FROM RENEWABLE ENERGY SOURCES: THE CASE OF "OUR CITY-KONYA PROJECT" **402**
FARUK KOSE, ILHAN KOC
PULSATING PERFORMANCE TESTS OF HYDROFORMING PRESS **408**
OMER FARUK GOKCEPINAR, MEVLUT AYDIN, HARUN MERT ILBEYLI, MEVLUT TURKOZ, MURAT DILMEC, HUSEYIN SELCUK HALKACI
PCA-SVM-RANDOM SEARCH OPTIMIZATION BASED APPLICATION FOR CLASSIFICATION OF DATE FRUITS ACCORDING TO PHYSICAL PROPERTIES **413**
MUHAMMET FATIH ASLAN
A DESIGN STUDY FOR MEMS COMB-DRIVE RESONATOR **417**
SERDAR TEZ
LOW-COST ENERGY MANAGEMENT SYSTEM IN HOMES **421**
FURKAN ACUN, MEHMET CUNKAS

THE ROLE OF THICKNESS AND POSITION OF PARTIAL METAL FOAM IN JET IMPINGEMENT COOLING **428**
MELISA ALBAYRAK, KAYHAN DAGIDIR, BUGRA SARPER
THE IMPACT OF GEOMETRICAL PARAMETERS OF STENOSIS ON BLOOD FLOW MODELING **434**
ALI MUFTUOGULLARI, MELISA ALBAYRAK, MUNIR SUNER, BUGRA SARPER
INVESTIGATION AND OPTIMIZATION OF THE EFFECT OF ANHYDROUS BORAX MINERAL ON THE VICKERS HARDNESS AND INDENTATION MODULUS VALUES OF IRON MATERIAL **439**
SENOL SAHIN, AYSEGUL BODUR YILMAZ, TALHA TUNAHAN KESEMENLI
INVESTIGATION OF DIFFERENT AIR CURTAIN DESIGN IN INDUSTRIAL TYPE VERTICAL REFRIGERATOR CABINETS **444**
MEHMET HALUK ERDOGAN, SERCAN DOGAN, SERCAN YAGMUR, AZIZ HAKAN ALTUN

Biomedical Engineering

Computer Engineering

Electrical and Electronics Engineering

Mechanical Engineering

Mechatronic Engineering

Metallurgical and Materials Engineering

Civil Engineering

ICENTE'22

INTERNATIONAL CONFERENCE ON ENGINEERING TECHNOLOGIES

November 17-19, 2022

Konya/TURKEY

icente.selcuk.edu.tr